

PRODUCT DATASHEET

LP™ 300

For Heavier Crude Oil

Background

LP™ 300 Flow Improver is part of the Lubrizol Specialty Products, Inc. (LSPI) range of innovative and technologically superior Flow Improver Solutions. As part of the portfolio, LP™ 300 Flow Improver has been designed specifically for heavier types of crude oil.

Characteristics

LP™ 300 Flow Improver is an aqueous suspension product with a greater affinity for heavier crudes. Like our other LP™ Flow Improvers, it can provide greater than 80% drag reduction.

Benefits

Great performance:

- Designed specifically to increase performance in heavier crudes.
- Great heat stability in tropical and desert environments.
- Greater than 80% drag reduction.
- Increases flow rates while maintaining current pipeline pressures.
- Maintains flow while reducing pipeline pressures.
- Allows shutting down of intermediate pump stations.

Superior technology:

- Improves pipeline capacity without capital investment.
- Less polymer required to achieve a given performance.
- Lower injection rates than other drag reducers.
- Faster dissolution rates than traditional drag reducers.
- Reduces internal corrosion rate by 40%.
- Reduces crude heat loss.


LP™ 300 Flow Improver allows companies to strategically reduce pipeline operating costs, increase throughput, decrease pressure or shut down intermediate pump stations.

LP™ 300 Flow Improver offers the same advanced polymer technology as other LiquidPower™ Flow Improvers. It dissolves into flowing product without coating pipeline walls and increases throughput while reducing internal corrosion rates. It allows greater amounts of active polymer to be deployed in a fixed amount of product while improving dissolution dynamics. The polymer of choice offers excellent hydrocarbon affinity and is able to attain elevated levels of drag reduction under varied operating scenarios. It also has the strength to effectively endure shear forces.

Handling

LP™ 300 Flow Improver is easy to handle, store and clean up. It flows easily and does not require nitrogen pressurized storage tanks.

See back page for product properties.

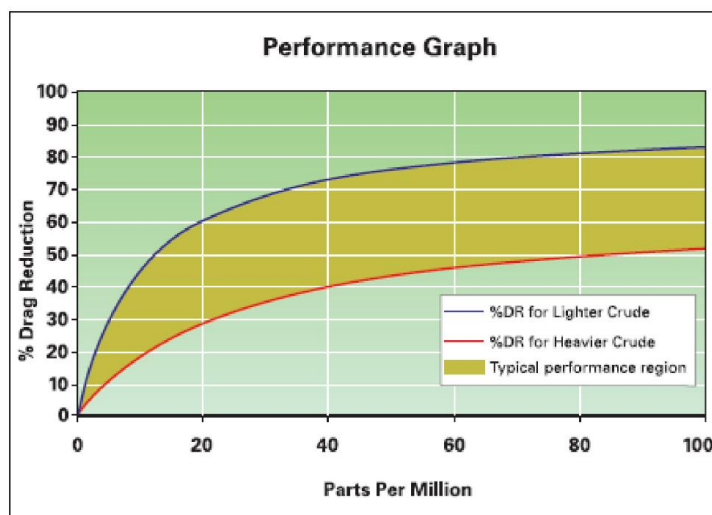

The performance curve shows the performance range in which LP™ 300 Flow Improver operates, depending on pipeline and crude conditions.

LP™ 300

Product Properties

GENERAL

Designed for use on	Heavier petroleum crude oil
Flow Improver type	Suspension
Carrier/Solvent	Water

PERFORMANCE

Maximum drag reduction	Greater than 80%
Typical concentration	5 to 50 ppm

TYPICAL PROPERTIES

Color	White
Density	8.0 lbs/gal (0.96 g/cm ³)
Flash Point	Not applicable
Viscosity	400 cP @ 511s ⁻¹ (Non-Newtonian) @ 77°F/25°C
Freezing Point	32°F (0°C)
Boiling Point	212°F (100°C)
Vapor Pressure	0.46 psia (23.8 mm Hg) @ 77°F/25°C

HANDLING

Operating range	32°F to 120°F (0°C to 48.9°C)
Product stability	Stable emulsion Intermittent agitation required
Pressure	No nitrogen or pressurized vessels required
Heating	Heating tracing and heating required under freezing conditions Climate control environment available

INJECTION EQUIPMENT

Pumps	Various designs available for different injection range and environments
Range	5 to 2,500 gal/day (20 to 9,500 L/day)
Flow meter	Mass (Coriolis)
Automation	Available

SAFETY AND ENVIRONMENTAL

Reference country specific Safety Data Sheet for local requirements.

Safety & Health (per U.S. OSHA)	Nonflammable; Nonhazardous Low toxicity. Conventional protection equipment
Environmental (per U.S. EPA)	Not classified as hazardous waste